



03/18/97

PATENT

Attorney Docket No.: 122mab

70270 U.S. PTO
08820670
03/18/97IN THE UNITED STATES PATENT AND TRADEMARK OFFICECommissioner of Patents and Trademarks
Washington, D.C. 20231UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of:

Inventors: Michael B. Taylor

For: Bit-Rate Transparent WDM Optical Communication System With Remodulators

Enclosed are:

☒ 13 pages of specification☒ 1 page(s) of Abstract☒ 3 pages of claims☒ 4 sheets of drawings [] formal [x] informal☒ 3 pages of Declaration and Power of Attorney☒ An assignment of the invention to: Ciena Corporation☐ Certified copy of applications:

<u>Country</u>	<u>Appln. No.</u>	<u>Filed</u>

from which priority under Title 35 United States Code, § 119 is claimed

☐ is enclosed.☐ will follow.CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date March 18, 1997 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number E611739 108705 addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Linda Goodall
(type or print name of person mailing paper)

Linda Goodall
(signature of person mailing paper)

03/18/97 08820670

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee
				\$770.00
Total Claims	6- 20 =	0	x \$22	\$0.00
Independent Claims	2- 3 =	0	x \$80	\$0.00
Multiple Dependent Claims	[] yes [x] no	Add'l. Fee	\$260.00 No Add'l. Fee	\$0.00
			TOTAL	\$770.00

For small entity, ÷ 2: **\$385.00**

[x] Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith.

[] The amount of **\$40.00** for recording the attached Assignment is included in the enclosed check.

[x] A check in the amounts of **\$425.00** to cover the [x] recording and [x] filing fee(s) is attached.

[] Charge fee to Deposit Account No. _____. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

[] Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and § 1.17, at any time during the pendency of this application, or credit any over payment of such fee(s) to Deposit Account No. _____. Also, in the event any extensions of time for responding are required for the pending application, please treat this paper as a petition to extend the time as required and charge Deposit Account No. _____ therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

[] Information Disclosure Statement with copies of references cited.

Date:

18 March 97


Margaret A. Burke

Attorney for Applicant

Registration No. 34,474

Ciena Corporation
Legal Department
920 Elkridge Landing Road
Linthicum, MD 21090
(410) 865-8500

**BIT-RATE TRANSPARENT WDM OPTICAL COMMUNICATION SYSTEM WITH
REMODULATORS**

FIELD OF THE INVENTION:

5 The invention relates to optical communication systems generally and, more particularly, to optical communication systems with remodulators which carry plural optical signals of different wavelengths simultaneously, the optical signals being generated by a variety of optical transmitters having various data rates.

10 **BACKGROUND OF THE INVENTION:**

 Optical communication systems are a substantial and fast-growing constituent of communication networks. The expression "optical communication system," as used herein, relates to any system which uses optical signals to convey information across an optical waveguiding medium. Such optical systems include, but are not limited to,
15 telecommunications systems, cable television systems, and local area networks (LANs). Optical systems are described in Gowar, Ed. Optical Communication Systems, (Prentice Hall, NY) c. 1993, the disclosure of which is incorporated herein by reference. Currently, the majority of optical communication systems are configured to carry an optical channel of a single wavelength over one or more optical waveguides. To convey information from
20 plural sources, time-division multiplexing is frequently employed (TDM). In time-division multiplexing, a particular time slot is assigned to each signal source, the complete signal being constructed from the portions of the signals collected from each time slot. While this is a useful technique for carrying plural information sources on a single channel, its capacity is limited by fiber dispersion and the need to generate high peak power pulses.

25 While the need for communication services increases, the current capacity of existing waveguiding media is limited. Although capacity may be expanded e.g., by laying more fiber optic cables, the cost of such expansion is prohibitive. Consequently, there

exists a need for a cost-effective way to increase the capacity of existing optical waveguides.

Wavelength division multiplexing (WDM) has been explored as an approach for increasing the capacity of existing fiber optic networks. In a WDM system, plural optical
5 signal channels are carried over a single waveguide, each channel being assigned a particular wavelength. Through the use of optical amplifiers, such as doped fiber amplifiers, plural optical channels are directly amplified simultaneously, facilitating the use of WDM systems in long-distance optical networks.

To provide compatibility of WDM systems with existing networks, it is desirable to
10 convert a signal from a received transmission wavelength from a customer to a specific channel wavelength within the WDM system. This is particularly true in WDM systems employing many channels, often referred to as “dense” WDM, where channel spacings are on the order of one nanometer or less. In assignee's prior patent and patent application, U.S. 5,504,609 and serial number 08/624,269, incorporated by reference above, a series
15 of optical remodulators are used to take input signals from various optical transmitters and output the information onto optical channels within the channel plan of a WDM optical system. These optical systems typically employ one-to-one correspondence between an optical channel input to an optical remodulator and an output channel produced by the optical remodulator. However, when the optical transmitters providing the source signals
20 have substantially different data rates from the optical channels used in a WDM system, it may be desirable to have other than one-to-one correspondence between the input and output optical signals. Further, it may be desirable to alter the bit rate of an incident optical signal to a rate best suited for propagation within a transmission line of a WDM optical system.

25 Thus, there is a need in the art for improved WDM optical communication systems which can receive incoming optical transmission signals of various data rates and place the

information from the transmission signals onto one or more optical channels within a WDM system.

SUMMARY OF THE INVENTION

5 The present invention provides improved compatibility between optical transmitters of various data rates and WDM optical communication systems. In the present invention, optical remodulators are configured to receive an optical signal, separate the information from that optical signal into N information streams (where N is a whole number greater than or equal to 2), and place the information onto N optical channels within the channel
10 plan of a WDM optical system. Alternatively, the present invention provides optical remodulators configured to receive N optical signals, combine the information from the N optical signals, and place the information onto a single output optical channel having a wavelength within the channel plan of a WDM optical system.

 More particularly, the present invention provides a wavelength division multiplexed
15 optical communication system compatible with optical transmitters producing optical signals with bit rates higher than the bit rates of the optical channels within the WDM optical system. The WDM optical system includes a first set of one or more optical transmitters, each optical transmitter producing an information-bearing optical signal at a first wavelength. A first set of one or more remodulators optically communicates with each
20 of the optical transmitters. The remodulators place information from each of the information-bearing optical signals of the first set of optical transmitters onto optical channels in the wavelength division multiplexed optical communication system.

 Each of the remodulators comprises an optical-to-electrical conversion element for receiving a transmitter information-bearing optical signal and outputting an electrical signal
25 corresponding to information from the transmitter information-bearing optical signal. Means are provided for receiving the electrical signal output by optical-to-electrical conversion element and for separating the received signal into N electrical signals, where N

is a whole number greater than or equal to 2. N remodulator lasers emit continuous wave optical carrier signals, the wavelength of each of the optical carrier signal being the wavelength of an optical channel in the wavelength division multiplexed optical communication system. The N electrical signals are routed to optical signal generators each
5 of which creates an information-bearing optical signal corresponding to an optical channel in the wavelength division optical communication system. An optical combiner optically communicates with each of the optical channels produced by the remodulators, the optical combining element combining the remodulator optical channels to form a multiplexed optical signal output to an optical waveguide.

10 At the receive end of the WDM optical system, a plurality of optical selectors are configured to select one or more optical channels in the wavelength division multiplexed optical communication system. The selected optical channels are routed to a plurality of optical receivers optically communicating with the optical selectors.

In an embodiment in which the bit rates of the optical transmitter signals are less
15 that the bit rates of the WDM optical channels, N optical transmitter signals are routed to a remodulator. The remodulator includes N optical-to-electrical conversion elements which communicate with an electrical multiplexer to combine the information from the N electrical signals output by the optical-to-electrical conversion elements. The output from the electrical multiplexer is used to create the information-bearing optical channel in the WDM
20 system.

BRIEF DESCRIPTION OF THE DRAWINGS:

FIG. 1 schematically depicts an optical communication system according to the present invention.

FIG. 2 schematically depicts a remodulator employed in the optical communication system of FIG. 1 which outputs an optical channel from plural input optical signals.

FIG. 3 schematically depicts a remodulator used in the optical communication system of FIG. 1 which outputs plural channels from an input optical signal.

FIG. 4 schematically depicts optical receiving systems employed in the optical communication system of FIG. 1.

DETAILED DESCRIPTION:

Turning to the drawings in detail in which like reference numerals indicate the same or similar elements in each of the several views, FIG. 1 depicts an optical communication system 10 according to an embodiment of the present invention. Optical communication system 10 takes optical transmission signals from diverse optical transmitters and other optical signal sources and maps the signal sources onto a wavelength division optical communication system, i.e., a communication system in which individual optical signals correspond to optical channels within a wavelength division multiplexed optical signal carried on an optical waveguide. In the exemplary embodiment of FIG. 1, the WDM optical communication carries a multiplexed optical communication signal comprised of 8 optical channels operating at OC-48 (2.5 Mb/s). Although a WDM optical signal can be comprised of individual channels of different data rates, the overall operating efficiency of the system is improved when each optical channel is at the same data rate.

In the optical system of FIG. 1, a variety of optical signal generators are used to provide the sources which will be carried by the optical channels within the WDM optical system. As seen in the FIG., four OC-12 transmitters 20 provide the information carried by OC-48 optical channel λ_1 . A single OC-192 optical transmitter 30 provides the

information carried by four OC-48 optical channels $\lambda_2, \lambda_3, \lambda_4, \lambda_5$. A remote optical transmitter 40, which may, for example, be a remodulator from another optical system or form a different portion of the same optical system, directly provides the optical channel having wavelength λ_6 . A local optical transmitter 50 directly outputs optical channel λ_7 .

- 5 Optical transmitter 60 outputs an OC-48 optical signal having a wavelength other than a wavelength within the channel plan of the optical system and is converted to optical channel λ_8 through single channel remodulator 62.

Optical transmitters 20, 30, 40, 50, and 60 generally includes a laser, such as a DFB semiconductor laser, and a modulator for creation of an information-bearing optical
 10 signal. Because some of the transmitters form part of an existing optical system, a wide variety of transmitters emitting in a broad range of wavelengths can be accommodated in the optical communication system of the present invention, thus ensuring compatibility with currently-deployed transmission equipment. Typical transmitters emit wavelengths ranging from about 1300 to 1600 nm. Transmitters in current optical communication systems and
 15 various optical modulation techniques employed therein are described in Gowar, Optical Communication Systems, incorporated by reference above. Optical transmitters suitable for use in the present invention are commercially available from NEC, Fujitsu, Alcatel, and Nortel.

Optical communication system 10 includes remodulators 22, 32, and 62 for
 20 receiving the transmitted information-bearing optical signal(s) the optical transmitters and transmitting an information-bearing optical signal at a WDM optical system channel wavelength λ_j . The subscript j ranges from 1 to 8 for the exemplary optical system of FIG. 1 but can also be, for example, 16 or 32 depending upon the capacity needs of the optical route services by the system. The expression "information-bearing optical signal," as used
 25 herein, refers to an optical signal which has been coded with information, including, but not limited to, audio signals, video signals, and computer data, generally through modulation. Similarly, the expression "non-information-bearing optical signal," as used

herein, relates to a CW optical signal which has not been coded with information, e.g., an optical carrier which has not been modulated. Typically, the wavelengths emitted by the remodulators are selected to be within the 1500 nanometer range, the range in which the minimum signal attenuation occurs for silica-based fibers. More particularly, the

5 wavelengths emitted by the remodulators are selected to be in the range from 1530 to 1560 nanometers. However, other wavelength bands may be selected according to overall system requirements.

For an 8-channel wavelength division multiplexed optical communication system, an exemplary channel plan is set forth in Table 1 below. The optical channel plan dictates

10 both the wavelengths of the optical remodulators and the corresponding wavelengths selected by the wavelength selectors in the optical receiving systems.

Table 1

Channel Number	Wavelength (nm)
1	1557.36
2	1555.75
3	1554.13
4	1552.52
5	1550.92
6	1549.32
7	1547.72
8	1546.12

15 To demonstrate the formation of a single optical channel from plural input signals and the formation of plural optical channels from a single input signal, FIGS. 2 and 3 respectively depict optical remodulators 22 and 32. In FIG. 2, remodulator 22 receives four OC-48 optical signals from optical transmitters 20 and outputs a single OC-48 optical

20 channel λ_1 carrying the information from all four of the input optical signals. The input optical signals are each converted by electro-optical converter 23, typically a photodiode, to

an electrical signal. Each electrical signal is amplified by amplifier 24, and routed through clock and data recovery circuit 25.

Each of the four electrical signals generated from the optical signals is routed to an input port of a 4:1 electrical multiplexer 26. Multiplexer 26 interleaves the optical signals into specific time slots, creating a time-division multiplexed electrical signal comprised of the four OC-12 input signals. Electrical multiplexers suitable for use in the remodulators of the present invention include NLG4218, commercially available from NEL. The resultant time division multiplexed electrical signal is used to drive modulator 28 through modulator driver 27.

Remodulator 22 also includes a optical source, such as laser 29, for delivering a non-information-bearing optical carrier signal to the laser output waveguide. In an exemplary embodiment, laser 29 is a DFB semiconductor diode laser, generally comprising one or more III-V semiconductor materials, commercially available from a wide variety of suppliers such as Fujitsu, GEC Marconi, and Hewlett-Packard. The laser outputs an optical carrier signal at a particular channel wavelength, λ_1 , the wavelength corresponding to a demultiplexer wavelength included in the receiving system. Laser control 21 provides the required laser bias current as well as thermal control of the laser. Using thermal control, in conjunction with a laser wavelength reference such as a Bragg grating, the precise operating wavelength of the laser is maintained, typically to within a one angstrom bandwidth.

Modulator 28 is typically selected from modulators which act on an optical carrier emitted from a continuous wave (CW) optical source, such as a laser. Such modulators can be packaged with the optical source or packaged separately from the optical source. An exemplary modulator for use as modulator 36 is a Mach-Zehnder interferometric modulator which provides high-speed intensity modulation of optical carriers. Details of electro-optic modulators are described in Becker, "Broad-Band Guided Wave Electrooptic Modulators," IEEE Journal of Quantum Electronics, Vol. QE-20, No. 7, July, 1984, pp. 723-727, the

disclosure of which is incorporated by reference herein. Mach-Zehnder interferometers suitable for use in electro-optic modulator 28 are commercially available from UTP and IOC.

Alternatively, the modulator employed in the remodulators of the present invention can be selected from electro-absorption modulators. Electro-absorption modulators function by changing the bandgap of the modulating material to impart information to the optical carrier signal. Exemplary electro-absorption modulators are described in Wood, "Multiple Quantum Well (MQW) Waveguide Modulators," Journal of Lightwave Technology, Vol. 6, No. 6, June, 1988, pp. 743-757, the disclosure of which is incorporated by reference herein.

For certain applications it may be economically desirable to use directly-modulated lasers (e.g., short-reach applications which can tolerate the chirp associated with directly-modulated lasers). For such applications the electrical signal output by multiplexer 26 would be input to the laser itself, e.g., through the laser driver.

To demonstrate the formation of a plural optical channels from a single input signal FIG. 3 schematically depicts remodulator 32. Remodulator 32 receives one OC-192 optical signal from optical transmitter 30 and outputs four OC-48 optical channels λ_2 , λ_3 , λ_4 , and λ_5 carrying the information from the input optical signal. The input OC-192 optical signal is converted by electro-optical converter 23, amplified by amplifier 24, and routed through clock and data recovery circuit 25, all of which are substantially similar to those depicted in FIG. 2.

The resultant electrical signals generated from the optical signals is routed to an input port of a 1:4 electrical demultiplexer 36. Demultiplexer 36 separates the optical signals into specific time slots, creating four electrical signals carrying the information from the OC-192 input signal. Electrical demultiplexers suitable for use in the remodulators of the present invention include NLG4219, commercially available from NEL. Each of the electrical signals created by the demultiplexer is used to drive modulator 28 through

modulator driver 27, as in the remodulators of FIG. 2. Remodulator 22 also includes laser 29 and laser control 21, as in the remodulator of FIG. 2. The alternate modulation techniques of discussed in conjunction with FIG. 2 are similarly applicable in this embodiment.

5 As stated previously, optical transmitters 40 and 50 produce optical signals which are already at wavelengths within the optical channel plan of the WDM optical system and therefore do not require remodulators before entering optical system 10. Optical transmitters 40 and 50 are commercially available from a variety of suppliers, including the OCT-204 series of optical transmitters from Alcatel, the HT2H-LR1H optical transmitters
10 from Fujitsu, and the ITS-2400 optical transmitters from NEC. In the case of remote optical transmitter 40, the transmitter may be part of another optical system or part of an add-drop system (in which case it represents a channel the was dropped from another system). Optical transmitter 60, which produces a wavelength not included in the WDM system channel plan but an optical signal at the same OC-48 data rate, is routed through
15 remodulator 62. Optical remodulator 62 is selected from the optical remodulators disclosed in U.S. Patent No. 5,504,609 and U.S. patent application serial numbers 08/624,269, filed March 29, 1996 and 08/____,____, filed June 24, 1996 (Attorney Docket Number 115mab) the disclosures of which are incorporated by reference.

Each optical channel, whether produced by a remodulator or optical transmitter, is
20 routed to optical combiner 70 for conveyance to optical waveguide 80. Optical combiner 70 is selected from any passive optical component which can combine plural wavelengths into a single output medium. Frequently, optical splitters used to divide a signal among plural outputs are used as optical combiners, operated in reverse fashion from the splitter. Exemplary optical combiners include 1 x N passive splitters available from Corning, Inc.,
25 Corning, NY, 1 x N wideband single mode splitters available from IOT Integrierte Optik GmbH, Waghäusel-Kirrlach, Germany, and fused fiber combiners available from Gould, Inc., Millersville, MD. The combination of channels forms a multiplexed optical signal

which is output to waveguide 80. Optical waveguide 80 is typically a single-mode optical fiber such as SMF-28, available from Corning, and TRUEWAVE, available from AT&T Corp./Lucent Technologies, and is the principal transmission medium for the optical communication system. However, any optical waveguide which is capable of transporting multiple optical wavelengths can be employed as waveguide 80 in optical system 10.

Optionally interposed along optical waveguide 80 are one or more optical amplifiers 90. Optical amplifiers 90 are selected from any device which directly increases the strength of plural optical signals without the need for optical-to-electrical conversion. In general, optical amplifiers 90 are selected from optical waveguides doped with rare earth ions such as erbium, neodymium, praseodymium, ytterbium, or mixtures thereof. Optical amplifiers, their materials, and their operation are further described in Gowar, Ed. Optical Communication Systems, incorporated by reference above and in Desurvire, Erbium-Doped Fiber Amplifiers, (John Wiley & Sons, Inc., NY), c. 1994, and Bjarklev, Optical Fiber Amplifiers: Design and System Applications, (Artech House, Norwood, MA) c. 1993 the disclosures of which are incorporated by reference herein. An exemplary optical amplifier configuration is disclosed in U.S. Patent application serial number 08/554,976, the disclosure of which is incorporated by reference herein. Alternatively, other optical amplifiers, such as semiconductor optical amplifiers, may be used along transmission line 80.

Following transmission and amplification of the multiplexed optical signals along waveguide 80, each channel must be demultiplexed and routed to the receiver designated for the particular λ_j channel. The multiplexed signal is input to optical splitter 100 which places a portion of the multiplexed signal onto plural output paths 102. Each output path 102 optically communicates with a receiving system 110. Optical splitter 100 is selected from any optical device which can divide an input optical signal and place it onto plural output paths. Exemplary splitters include passive optical components such as those components described for use as optical combiner 70.

FIG. 4 schematically depicts an exemplary receiving systems 110 for use in optical communication system 10. Although the receiving systems for channels 1-5 only are depicted, the receiving systems for channels 5-8 are substantially similar and are not shown for clarity of presentation. Receiving system 110 includes a wavelength selector 120 for selecting the particular channel, λ_j , from the multiplexed signal and receiver 130. To perform the channel selection, the multiplexed signal is routed to wavelength selector optical filter 122 through splitter 124. The optical filter passes optical signals having wavelengths other than the channel wavelength λ_j to be sent to the receiver. These non-selected channels pass through low reflectivity port 126 and exit the optical communication system. The low reflectivity port 126 can be performed through an angled fiber cut termination into a light-absorbing medium although any low reflectivity waveguide termination technique may be employed. The channel wavelength λ_j is reflected by optical filter 122 to receiver 130 through splitter 124. The unused optical signals exit splitter 124 through low-reflectivity port 128. In an exemplary embodiment, the optical filter comprises a Bragg grating member which reflects the channel wavelength λ_j and transmits all other wavelengths. Consequently, the channel wavelengths emitted by the remodulators are matched to the reflection wavelengths of the Bragg gratings incorporated in the receiving systems. Preferably, the Bragg grating comprises a series of photoinduced refractive index perturbations in an optical fiber which causes the reflection of optical signals within a selected wavelength band. Bragg gratings suitable for use in the optical system of the present invention are described in Morey et al., "Photoinduced Bragg Gratings in Optical Fibers," Optics and Photonics News, February 1994, pp. 8-14, the disclosure of which is incorporated by reference herein.

The reception channel wavelength λ_j is input to receiver 130 through splitter waveguide 129. Optionally, the signal may be optically amplified before it reaches the receiver. Receiver 130 detects the optical signal and converts it to an electrical signal, typically through the use of a photodiode device. Various optical receivers suitable for use

in optical system 10 are described in Gowar, Optical Communication Systems, discussed above and are commercially available from Nortel, NEC, Alcatel, and Lucent Technologies.

To recreate four OC-12 optical signals from the OC-48 λ_1 optical channel, the electrical signal from receiver 130 is routed to 1:4 electrical demultiplexer 140. Demultiplexer 140 creates four OC-12 signals from the interleaved time slots of the OC-48 signal. Similarly, the OC-192 optical signal is created by combining the four OC-48 optical channels, λ_2 - λ_5 , in electrical multiplexer 150, placing a portion of each of the OC-48 signals into the appropriate time slot as in the original OC-192 signal.

While the foregoing invention has been described in terms of the embodiments discussed above, numerous variations are possible. For example, when plural optical channels are created by a remodulator from a single input signal, those channels may be routed to separate optical systems, instead of to the same optical system as depicted above. The remodulators of the present invention may further include error reduction techniques such as forward error detection, as described in the 08/____, ____ (Attorney Docket Number 115mab) patent application, incorporated by reference above. Additional overhead bits may be added when plural optical channels are created from a single optical signal or when a single optical channel is created from plural optical signals. Accordingly, modifications and changes such as those suggested above, but not limited thereto, are considered to be within the scope of following claims.

WHAT IS CLAIMED IS:

1. A wavelength division multiplexed optical communication system for transmitting a plurality of optical communication channels on an optical waveguide, each optical communication channel having a distinct channel wavelength, the optical
5 communication system comprising:

a first set of one or more optical transmitters, each optical transmitter configured to transmit an information-bearing optical signal at a particular wavelength;

one or more remodulators optically communicating with the optical transmitters in the first set of optical transmitters, the remodulators placing information
10 from the information-bearing optical signals of the first set of optical transmitters onto optical channels in the wavelength division multiplexed optical communication system, each of the remodulators comprising:

an optical-to-electrical conversion element for receiving a transmitter information-bearing optical signal and outputting an electrical signal corresponding to
15 information from the transmitter optical signal;

means for receiving the electrical signal output by optical-to-electrical conversion element and separating the received signal into N electrical signals, where N is a whole number greater than or equal to 2;

N means for creating optical signals including the information from
20 each of the N electrical signals, each of the N optical signal-creating means communicating with the means for separating the received signal into N electrical signals, the N optical signal-creating means each outputting an information-bearing optical signal corresponding to an optical channel in the wavelength division optical communication system;

an optical waveguide;

25 an optical combining element optically communicating with the optical channels produced by the remodulators, the optical combining element combining the

remodulator optical channels to form a multiplexed optical signal output to the optical waveguide;

a plurality of optical selectors optically communicating with the optical waveguide, each optical selector configured to select one or more optical channels in the wavelength division multiplexed optical communication system; and

a plurality of optical receivers optically communicating with the optical selectors.

2. A wavelength division multiplexed optical communication system as recited in claim 1 wherein each of the N means for creating optical signals includes a laser and a modulator.

3. A wavelength division multiplexed optical communication system as recited in claim 2 wherein the modulator is an electro-optic modulator.

4. A wavelength division multiplexed optical communication system as recited in claim 3 wherein the electro-optic modulator includes a Mach-Zehnder interferometer.

5. A wavelength division multiplexed optical communication system as recited in claim 3 wherein the modulator is an electro-absorption modulator.

6. A wavelength division multiplexed optical communication system comprising:
an optical transmitter which produces a modulated optical signal;
an optical remodulator optically communicating with the optical transmitter,
for placing information from the modulated optical signal of the optical transmitter onto plural optical channels in the wavelength division multiplexed optical communication system, the remodulator comprising:

an optical-to-electrical conversion element for receiving the transmitter modulated optical signal and outputting an electrical signal corresponding to information from the transmitter optical signal;

an electrical demultiplexer for receiving the electrical signal output
5 by optical-to-electrical conversion element and separating the received signal into N electrical signals, where N is a whole number greater than or equal to 2,

N remodulator lasers for emitting continuous wave optical carrier signals, the wavelength of each of the optical carrier signal being the wavelength of an optical channel in the wavelength division multiplexed optical communication system;

10 N modulators for modulating each of the optical carrier signals emitted by the remodulator lasers, each of the N modulators communicating with one of the N electrical signals output from the separating means for imparting the information from the electrical signal to the optical signal through the modulator to create an information-bearing optical signal corresponding to an optical channel in the wavelength division optical
15 communication system;

an optical waveguide;

an optical combining element optically communicating with the optical channels produced by the remodulators, the optical combining element combining the remodulator optical channels to form a multiplexed optical signal output to the optical
20 waveguide;

a plurality of optical selectors optically communicating with the optical waveguide, each optical selector configured to select one or more optical channels in the wavelength division multiplexed optical communication system;

a plurality of optical receivers optically communicating with the optical
25 selectors; and

an electrical multiplexer for creating a multiplexed electrical signal including the information from each of the optical channels output by the remodulator.

ABSTRACT OF THE DISCLOSURE

The present invention provides improved compatibility between optical transmitters of various data rates and WDM optical communication systems. In the present invention, optical remodulators are configured to receive an optical signal, separate the information from that optical signal into N information streams (where N is a whole number greater than or equal to 2), and place the information onto N optical channels within the channel plan of a WDM optical system. Alternatively, the present invention provides optical remodulators configured to receive N optical signals, combine the information from the N optical signals, and place the information onto a single output optical channel having a wavelength within the channel plan of a WDM optical system.

20080520 10:45:00

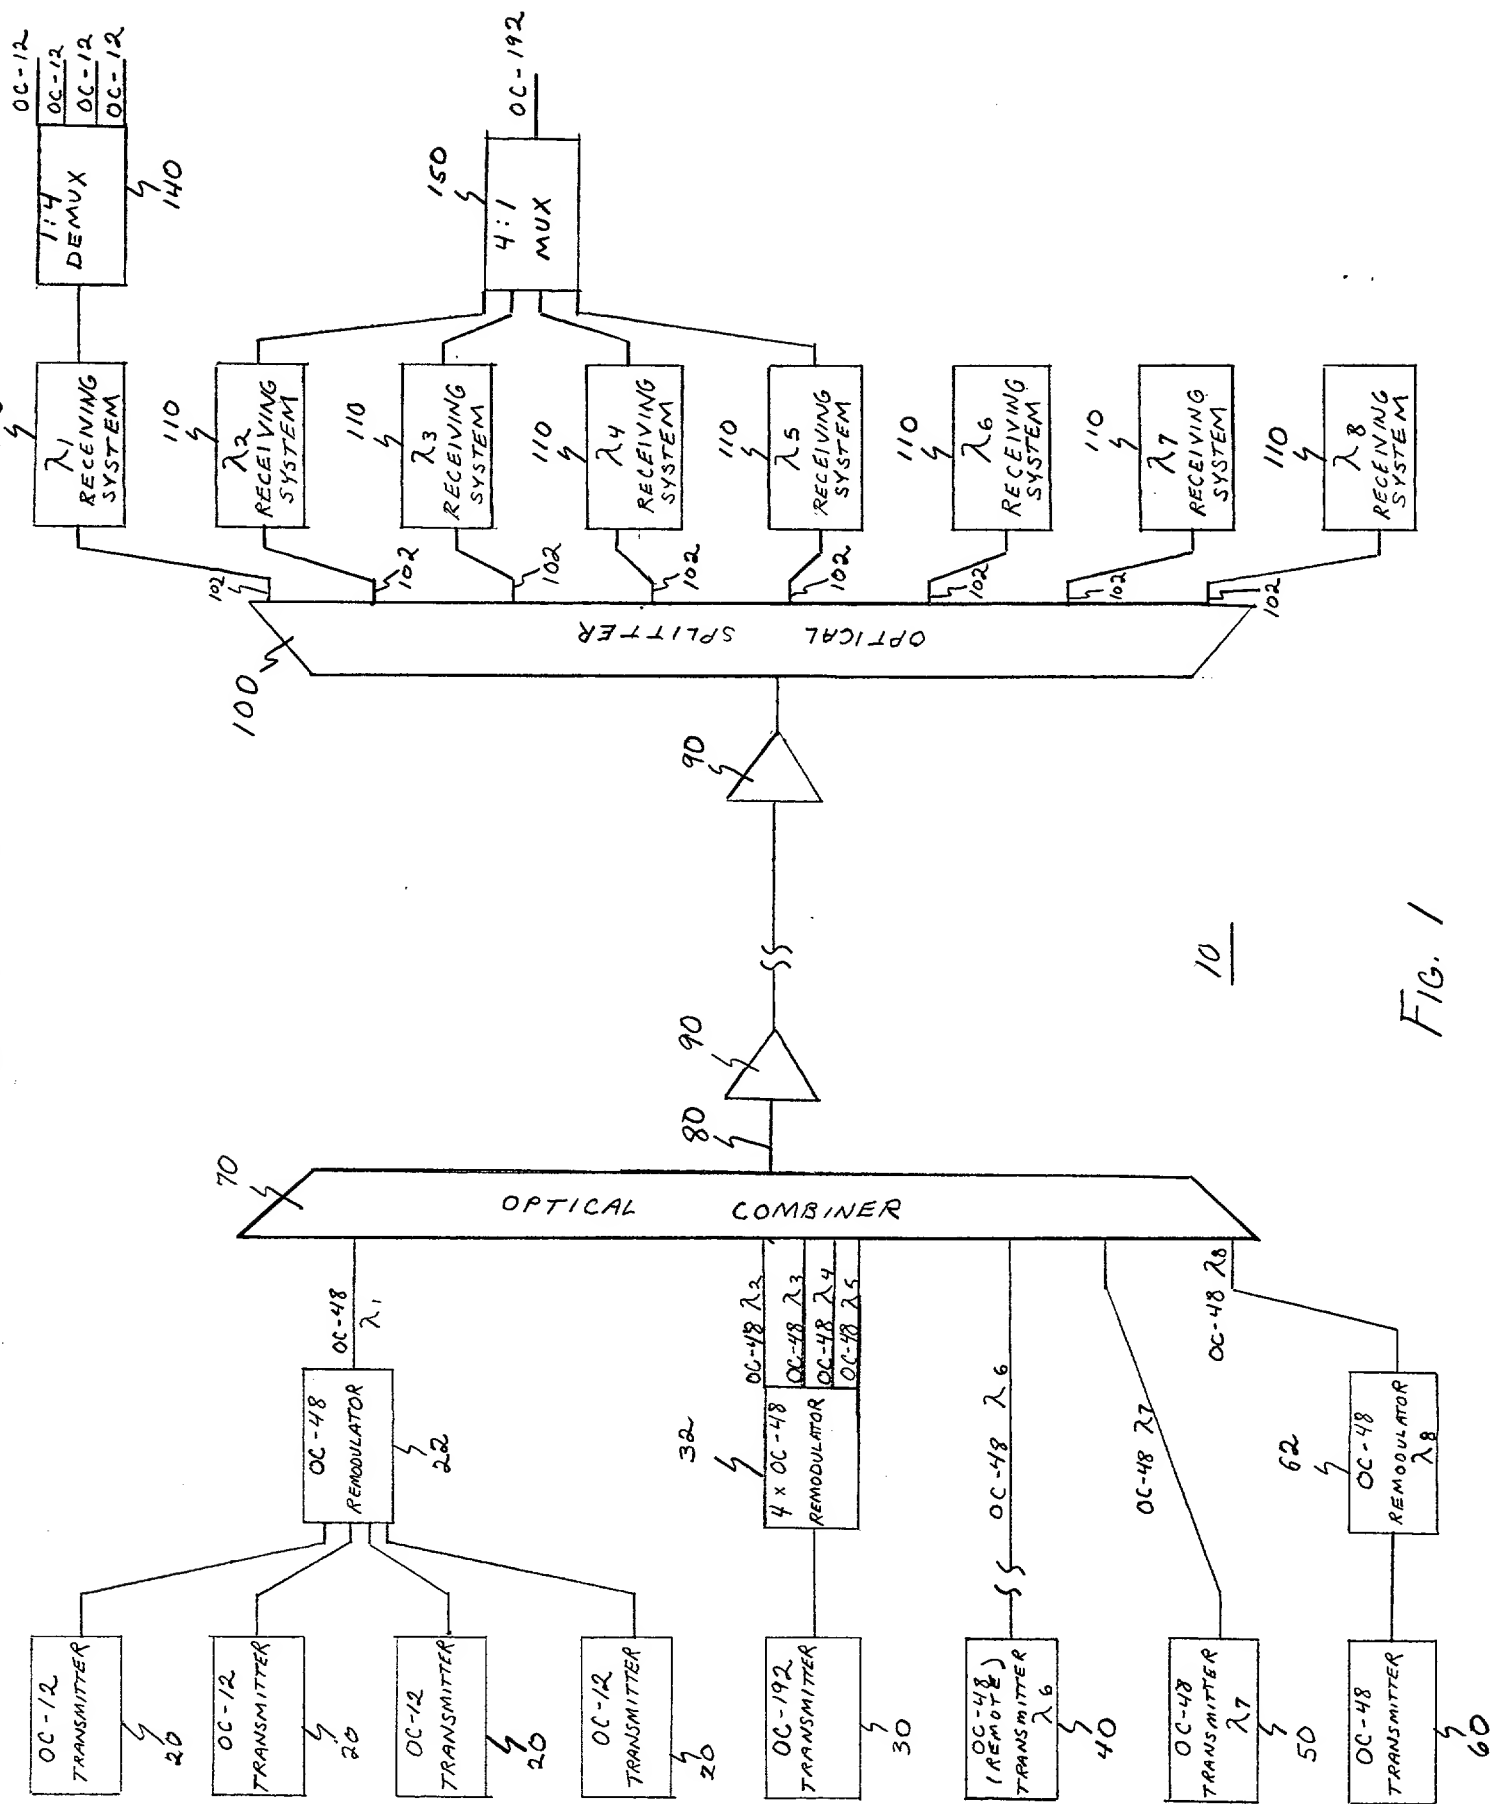


FIG. 1

2025 RELEASE UNDER E.O. 14176

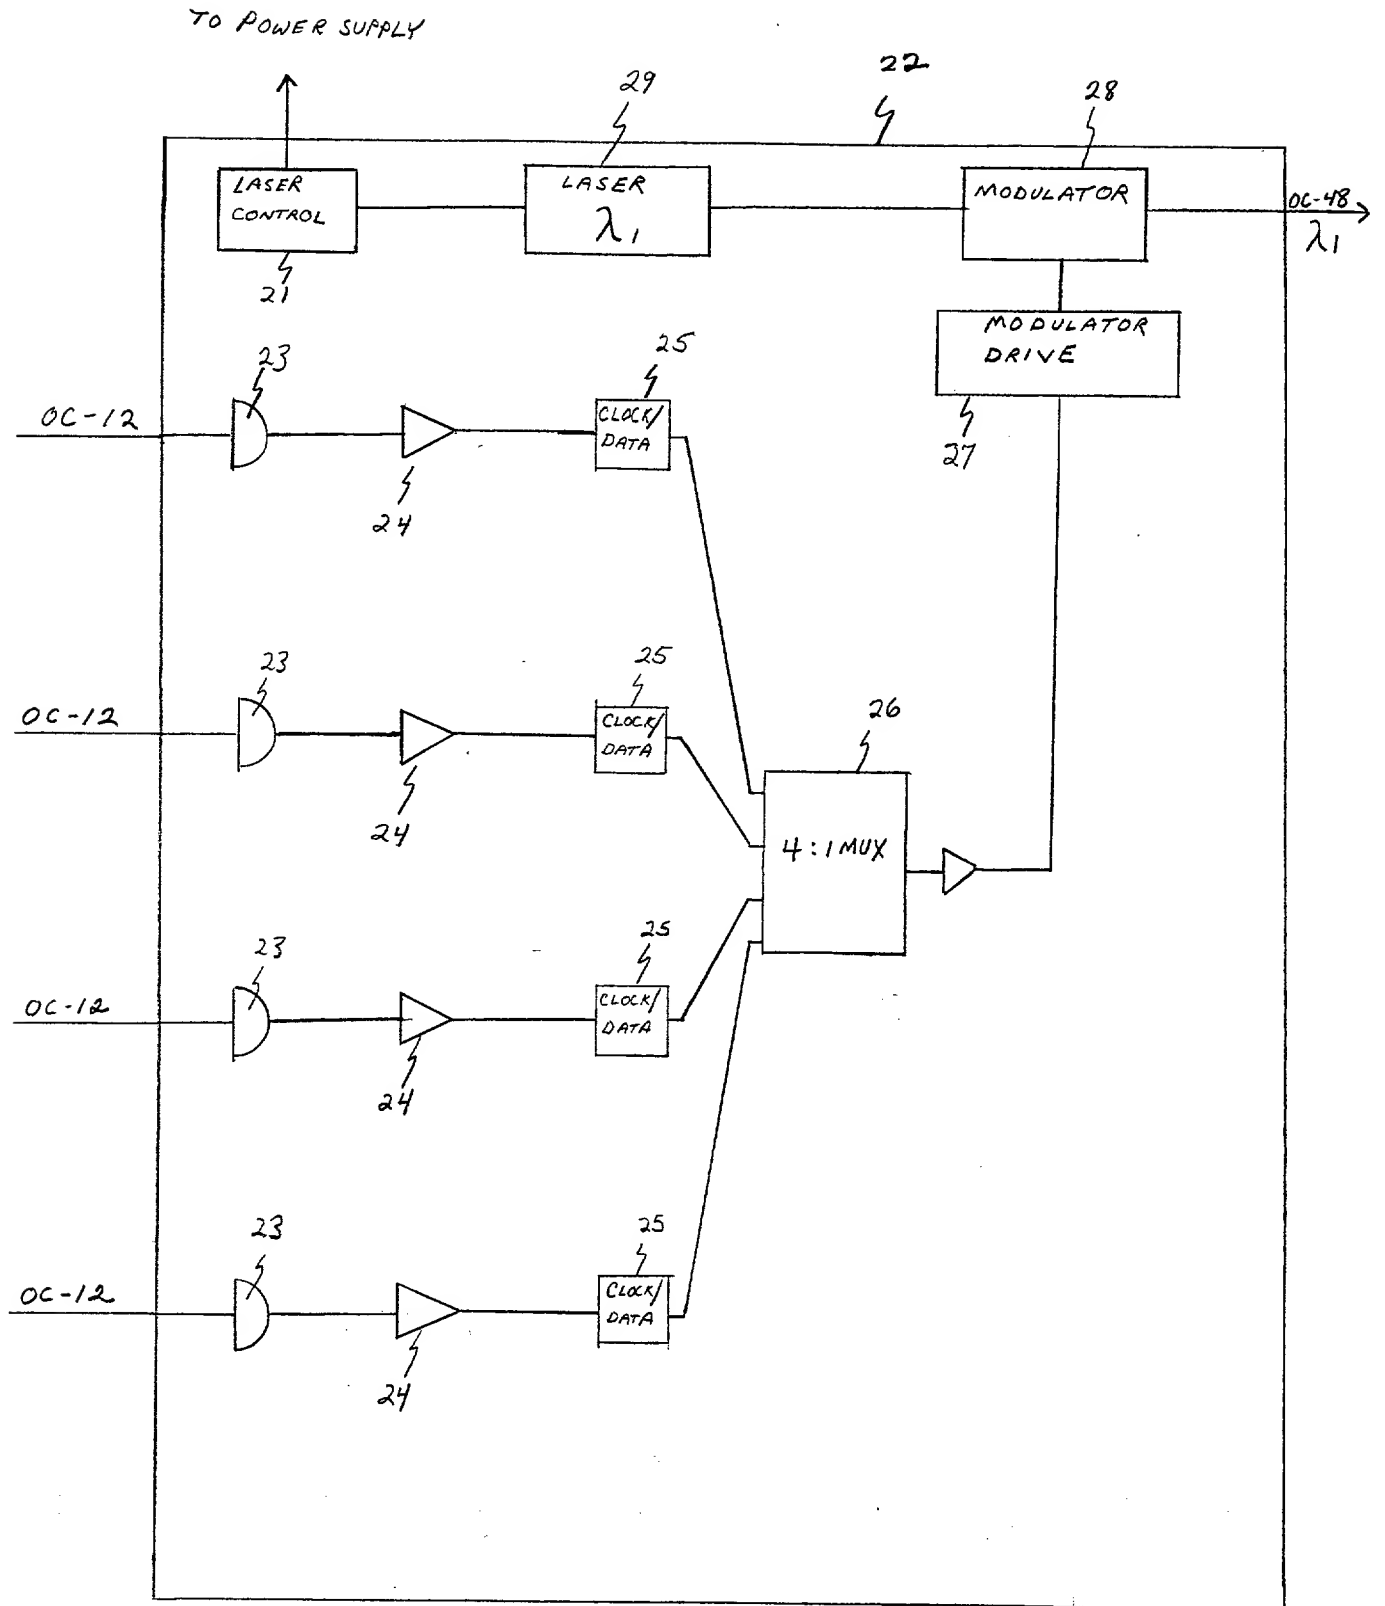


FIG. 2

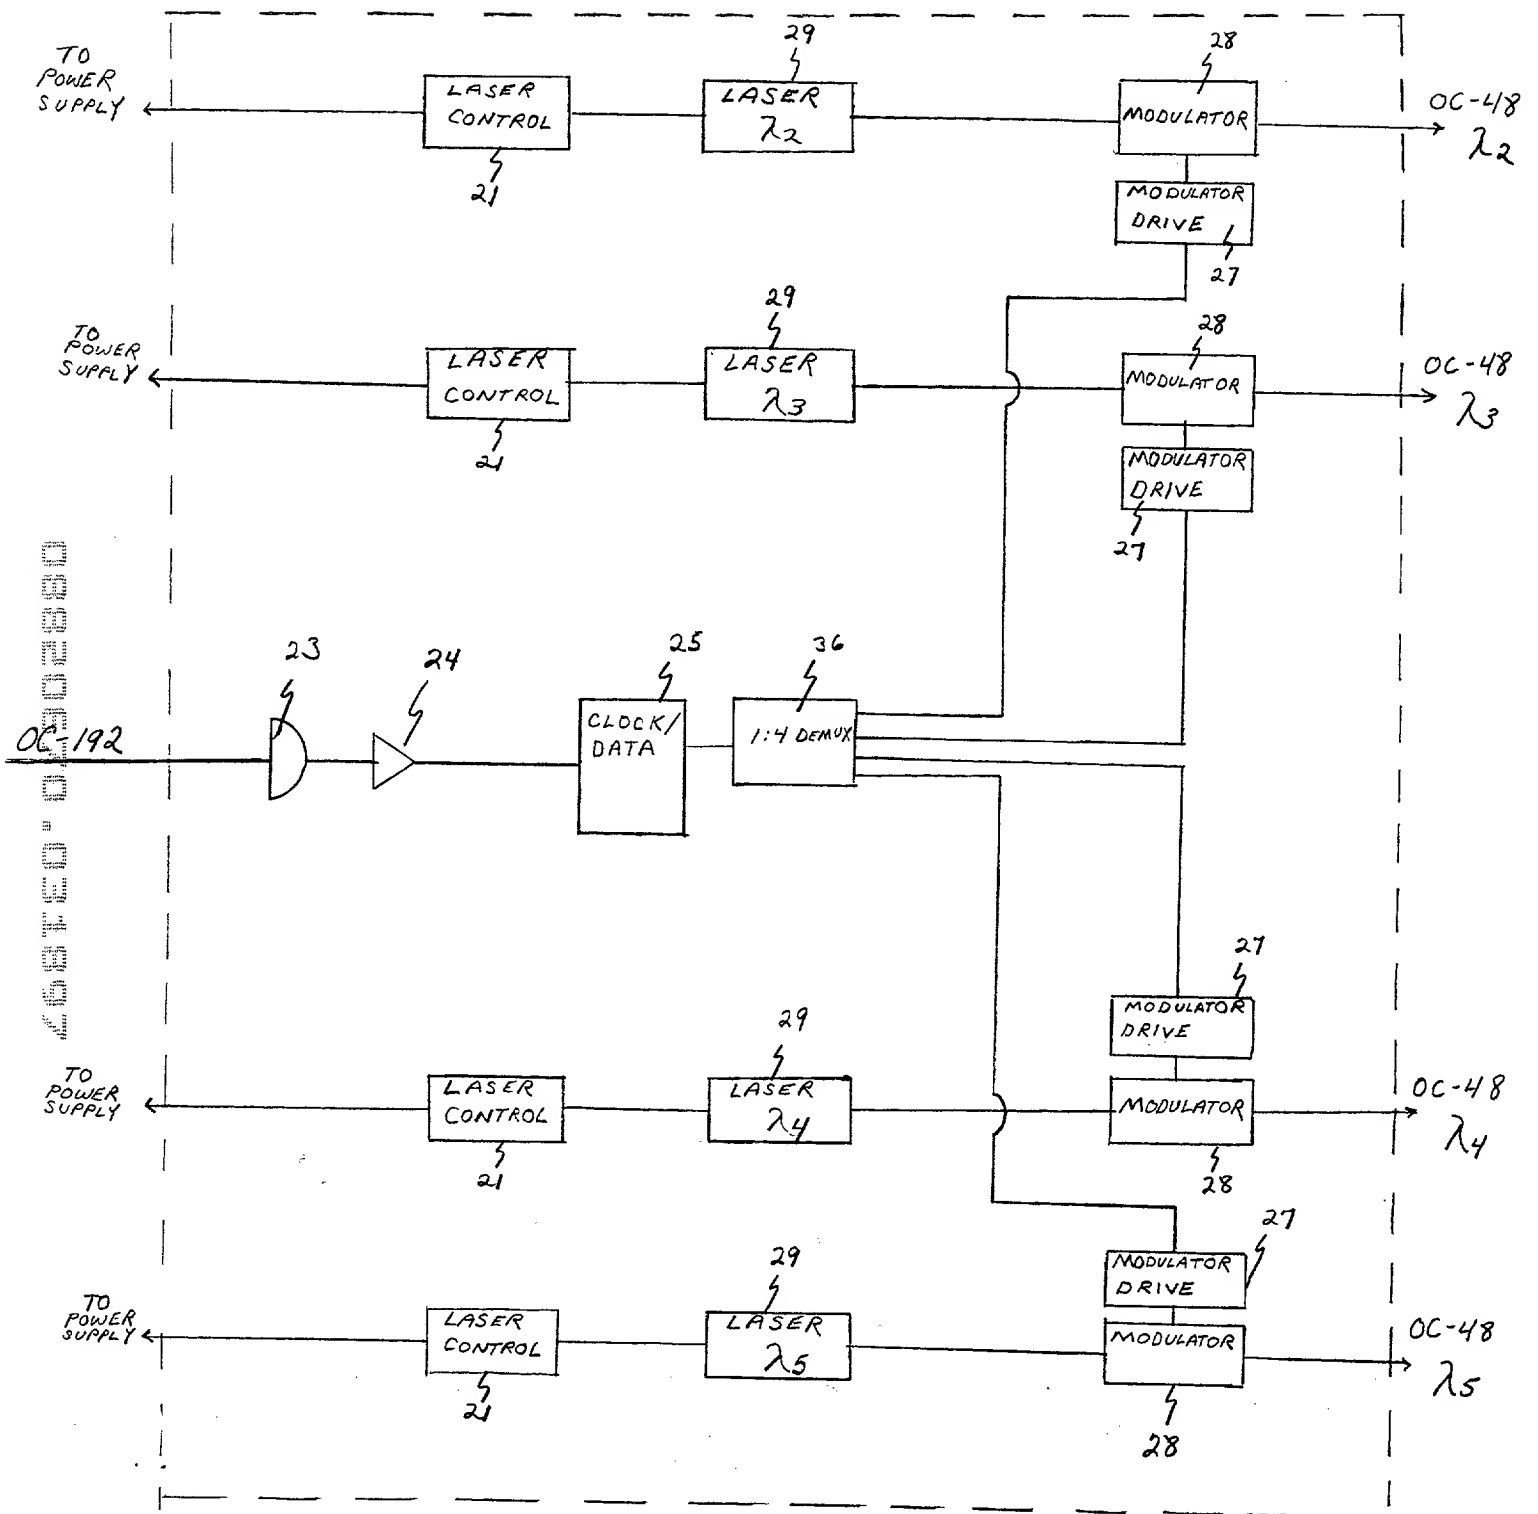


FIG. 3

2025 RELEASE UNDER E.O. 14176

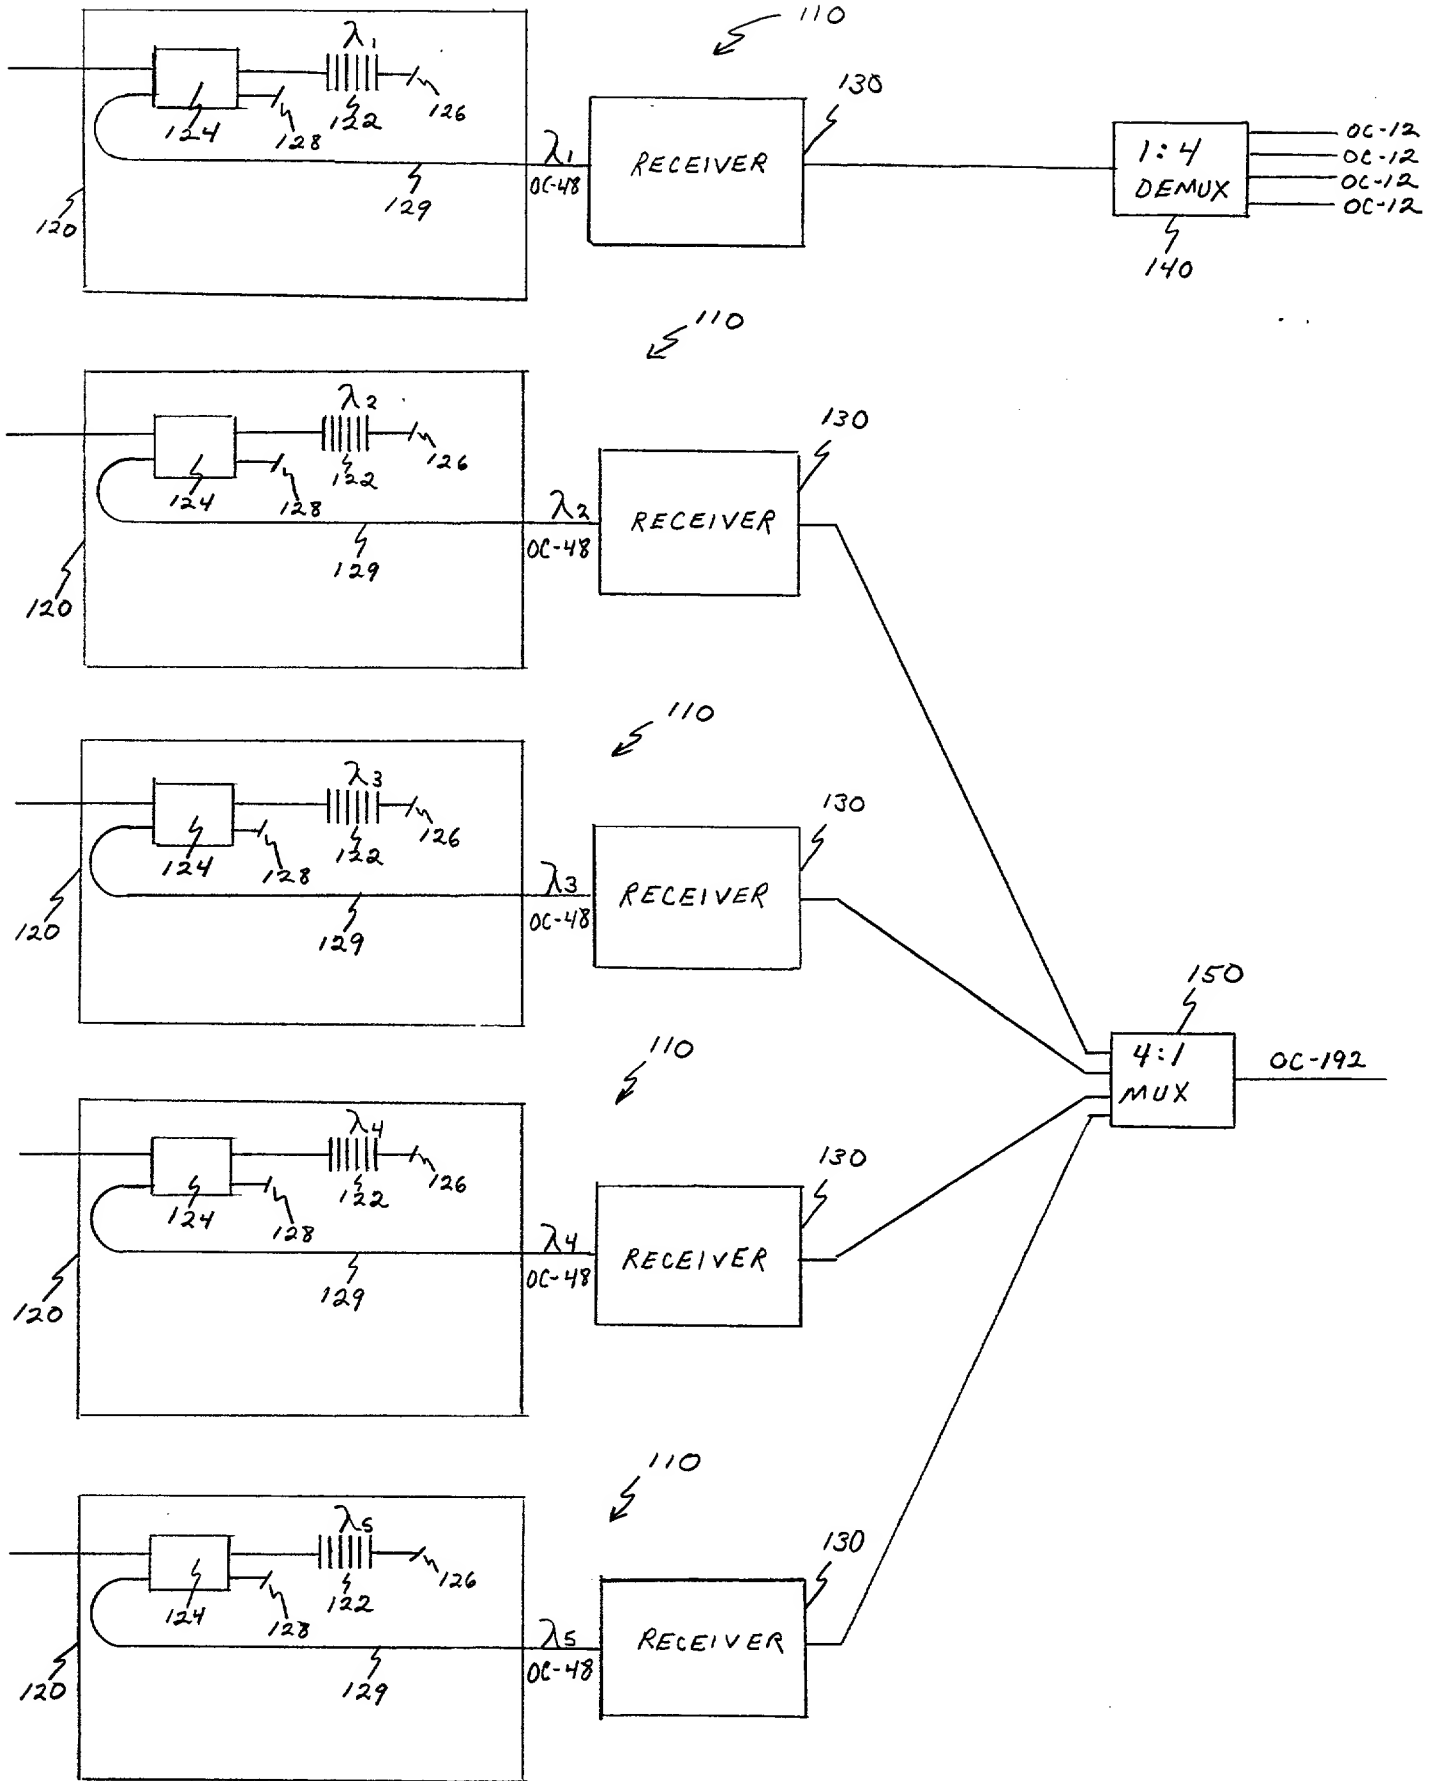


FIG. 4

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type:

- ☒ original
- ☐ design
- ☐ supplemental
- ☐ national stage of PCT
- ☐ divisional
- ☐ continuation
- ☐ continuation -in-part

INVENTORSHIP IDENTIFICATION

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BIT-RATE TRANSPARENT WDM OPTICAL COMMUNICATION SYSTEM WITH REMODULATORS

SPECIFICATION IDENTIFICATION

the specification of which:

- ☒ is attached hereto.
- ☐ was filed on _____ as ☐ Serial No. _____ or Express Mail No. _____ (as Serial No. is not yet known) and was amended on _____, (if applicable).
- ☐ was described and claimed in PCT International Application NO. _____ filed on _____ and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information

- ☒ which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56
- ☒ and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent, and
- ☐ in compliance with this duty there is attached an information disclosure statement in accordance with 37 C.F.R. § 1. 98.

PRIORITY CLAIM (35 U.S.C. § 119)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119, of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) for designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

☒ no such applications have been filed

☐ such applications have been filed as follows:

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119

Country (or indicate if PCT)	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. §119
			<input type="checkbox"/> yes <input type="checkbox"/> no
			<input type="checkbox"/> yes <input type="checkbox"/> no
			<input type="checkbox"/> yes <input type="checkbox"/> no

ALL FOREIGN APPLICATION(S), IF ANY, FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Margaret A. Burke Reg. No. 34,474
Stephen R. Whitt Reg. No. 34,753
David L. Soltz Reg. No. 34,731

SEND CORRESPONDENCE TO:

Stephen B. Whitt
Legal Department
920 Elkridge Landing Road
Linthicum, MD 21090

DIRECT TELEPHONE CALLS TO:
(Name and telephone number)

Stephen B. Whitt
(410) 865-8500

Variable	Mean	SD	Min	Max
Age	35.2	12.5	18	65
Gender	Male	10.5	0	20
Marital status	Married	15.2	0	20
Education	High school	12.5	0	20
Occupation	Unemployed	10.5	0	20
Income	\$15,000	\$10,000	\$0	\$40,000
Health status	Good	15.2	0	20
Smoking	Non-smoker	10.5	0	20
Alcohol	Non-drinker	10.5	0	20
Exercise	Regular	10.5	0	20
Stress	Low	10.5	0	20
Depression	None	10.5	0	20
Loneliness	Low	10.5	0	20
Life satisfaction	High	10.5	0	20
Quality of life	High	10.5	0	20
Healthcare use	Low	10.5	0	20
Health insurance	Medicaid	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20
Healthcare satisfaction	High	10.5	0	20
Healthcare access	Good	10.5	0	20
Healthcare quality	High	10.5	0	20
Healthcare cost	Low	10.5	0	20

Full name of first or sole inventor: Michael G. Taylor

M G Taylor

Residence: Laurel, MD

[x] The declaration ends with this page.

Attorney Docket No.: 122mab

Applicants or Patentees: Michael G. Taylor

Serial No. or Patent No.: not yet assigned

Filed or Issued: filed herewith

For: Bit-Rate Transparent WDM Optical Communication System With Remodulators

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(c))-SMALL BUSINESS CONCERN

I hereby declare that I am

☐ the owner of the small business concern identified below:

☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN: Ciena Corporation

ADDRESS OF SMALL BUSINESS CONCERN: 920 Elkridge Landing Road
Linthicum, MD 21090

I hereby declare that the above-identified small business concern qualifies as a small business concern as identified in 13 CFR 121.1301 through 121.1305 and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third-party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

☒ the specification filed herewith with title as listed above.

☐ the application identified above.

☐ the patent identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). Separate verified statements from each named person, concern, or organization having rights to the invention averring to their status as small entities is attached.

NAME: _____

ADDRESS: _____

☐ Individual ☐ Small Business Concern ☐ Non-Profit Organization

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

ADDRESS OF PERSON SIGNING: 920 Elkridge Landing Road Linthicum, MD 21090

SIGNATURE Steph Salas DATE: 3/13/97